

WIFI-BFT-KPAD

RANGE

Access Control

Video Intercom
WiFi/LAN

WIFI-BFT-KPAD



WiFi/LAN
Video Intercom



WiFi VIDEO

- Speak to, and see visitors from your smart-phone or tablet.
- Easy wireless connection to existing home wifi.
- Long range directional patch antenna at gate (up to 30-150 yards dependent on router and environmental conditions)
- Can call up to 4 devices at the same time.
- Get a video call from your gate / door even when you're away
- No SIM card, no call charges (data charges may apply when phone not connected to wifi).
- No home phone line needed
- Less susceptible to lightning strikes - no wire in the ground

Get the BFT Predator Pro APP at itunes and Google Store

Simple setup by mobile phone. Connect to the system video directly through your phone's or tablet's wifi, enter the pass code for the home hub wifi and your devices are connected.

View the gate/door any time with monitoring mode!

Open gates with your phone / tablet.

Built in RJ45 Ethernet socket for CAT5 cabled installs.

Can work with most open market Ethernet-over-mains adaptors for longer range applications




Be ahead

www.BFTGateOpeners.com | (800) 878-7829

WIFI-BFT-KPAD

Physical Measurements

Wifi-BFT-KPAD

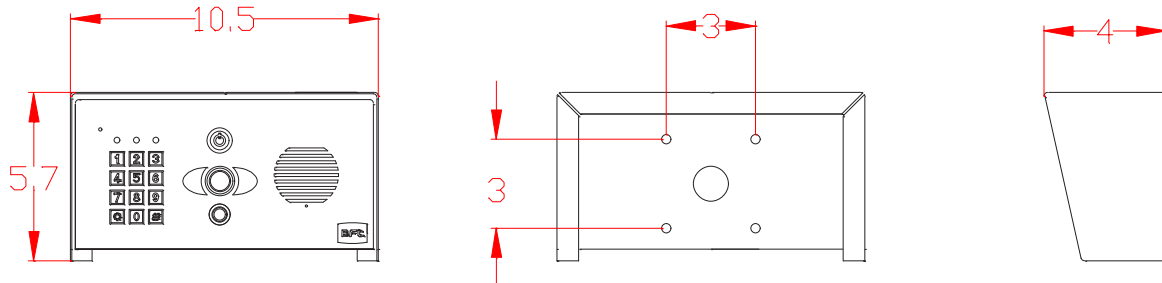

Technical Data

WIFI-BFT-KPAD

General

Voltage: 24v dc.
Recommended cable @ 25 feet: 14 gauge.
Solar operable: Yes with high capacity panels.
Current on standby: 90mA
Operating Current: 300mA
Peak Demand Current: 2 amps

Camera

Color: Yes.
Viewing angle: 100 degrees.
Night Vision: Yes, mono with IR illumination.
Pixels: 640 x 480

Keypad Module

Relays: 3 relays, max 2 amp, 24v ac/dc load.
Latching: Yes
Codes: 1000 total

Antenna

Frequency: 2.4GHz.
Gain: 14dB
Typical range: Approx 20 yds further from router than a phone.
Cable: 30 feet RG58, 50 ohm, with SMA male.
Transmission Angle: 60 Degrees.



Be ahead